
Large Incandescent Indicators


FOR MOUNTING IN 1" CLEARANCE HOLE FOR 24 TO 250V OPERATION

These series indicator lights meet or exceed requirements of MIL-L- 3661.

For materials and finishes of products in this group, see page 29D.



Recognized under the component program of Onderwriters' Laboratories Inc.
75W., 125V.

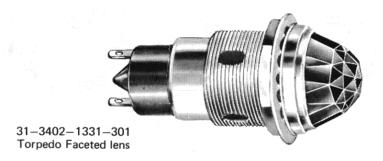

fixed solder

WITH FRICTION—FIT LENS CAPS (Also available with bayonet lock lens cap. Contact factory for information.)

fixed screw

	31 SERIES	1/16 PANEL (REF). 1/8 x 1 1/8 ±.020 O.D. INTERNAL TOOTH LOCKWASHER. 1/8 x 1 1/8 ±.020 U.S. 1 1/8 ±.020 U.S	6-32 THD.
	BASE PART NUMBERS	31-3402-05-101	31-3202-05-101
CAP PART NUMBERS		COMPLETE ASSEMBLY PART NUMBERS	
1-1/8 5/16 5/16	TORPEDO 31-0511-300 back frosted 31-0531-300 unfrosted	31-3402-0511-301 31-3402-0531-301	31-3202-0511-301 31-3202-0531-301
1-1/8 5/16	DOME 31-1211-300 back frosted 31-1231-300 unfrosted	31-3402-1211-301 31-3402-1231-301	31-3202-1211-301 31-3202-1231-301
1-1/8 5/16 MAX.	TORPEDO FACETED 31-1331-300 unfrosted	31-3402-1331-301	31-3202-1331-301

Order complete with lamp to be assured of receiving the indicator light and correct lamp together for immediate use.