


Ultra-Far Range Laser

VLM-635/650-18 Series

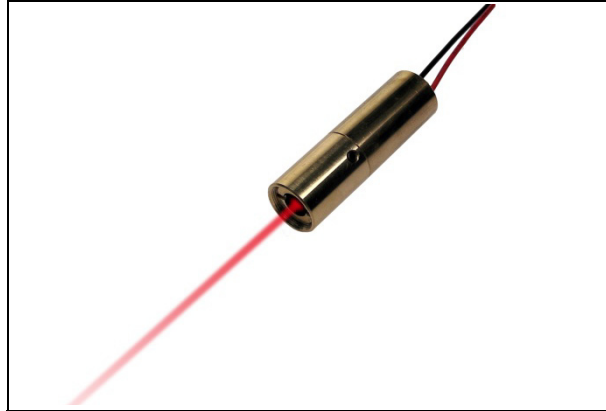

FEATURES:


- Ultra-Far Range Dot Laser.
- Diffraction Limited Lens to achieve a near-collimated Laser system, which can be sighted Ultra-Far distance range.
- This module has integrated optic, laser diode, and APC driver circuit.
- APC Driver Circuit enables the Laser output power safe and constant.
- Includes patented solid brass structure for the best shock resistance and better heat transfer consideration.
- Glass-base hybrid lens provides Ultra-Far range Dot Laser.
- Dimensions: $\Phi 13 \times 43.5$ mm ($\Phi 0.512" \times 1.713"$)
- Wavelength : 635/650 nm
- Output power : 2.5mW, Class IIIa.
- Beam Divergence: 0.2 mRad.
- 2.6~5 VDC operation.
- Connection type: Lead wire.

APPLICATIONS:

- Red Dot Laser-glass aspherical lens with long back focus length function to generate smallest spot at long distances. Ideal use for long distance position, targeting, professional laser sight and security monitor.
- Wood processing.
- Metal processing.
- Stone processing.
- Textile industry.
- Food industry.
- Automotive industry.
- Medical science

VLM-635/650-18 Series

OUTLINE DIMENSIONS (UNITS: mm)

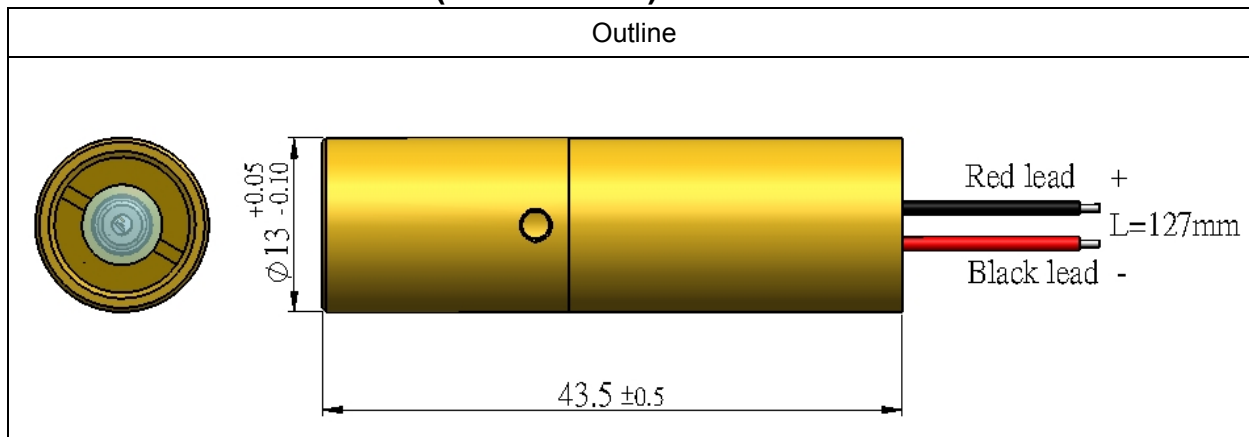

SPECIFICATIONS

SPECIFICATIONS		635-18	650-18
1	Dimensions	Φ13 x 43.5 mm (Φ0.512" x 1.713")	
2	Operating voltage (Vop)	2.6~5 VDC	
3	Operating current (Iop)	< 50mA	< 35mA
4	Continuous wave output power (Po)	2.5±1mW	
5	Wavelength at peak emission (λp)	630~645nm	645~665nm
6	Collimating lens	Glass-base hybrid lens(ø8)	
7	Spot size at 40M	< 16 mm	
8	Divergence (Half Angle)	0.2 mRad	
9	Operating temp. range	-20°C ~+50°C	
10	Storage temp. range	-40°C ~+70°C	
11	Housing	Brass	
12	Mean time to failure (MTTF) 25°C	5000hrs	10000hrs

Note : Laser module housing is an electrical positive surface, it is imperative that contact between the laser module and the machine be avoided. This is to prevent damage from the machine electrical leakage. Surge protected power supply to the laser module is strongly recommended.

VLM-635/650-18 Series

ORDER CODE

Order Code	Wavelength	Output Power	Connection Type
VLM-635-18 LPA	635 nm	2.5mW	Lead Wire
VLM-650-18 LPA	650 nm	2.5mW	Lead Wire

SAFETY LABEL

